



**PXWALL™**  
**SELF-ADHESIVE SOLID WOOD WALL COVERING**

---



**P**rodux concept & services AG offers you a comprehensive and DIY-tested wall covering range. All products can be packaged individually as a private label. The self-adhesive wood wall coverings are

solid pine boards. The wood is thermally modified to keep it particularly stable in terms of its shape. The the front side features different surface structures and is then finally treated in various colours. The structures and

colours can be combined with one another. The the back side has been fitted with three strips of extra sticky double-sided adhesive strips during the production process.



## CONTENT

PAGE	TOPIC
04	APPLICATION EXAMPLES
06	COLLECTION
08	ARTICLE LIST
09	ASSEMBLY INSTRUCTIONS
10	LOGISTICS
11	POS

### PRODUCT FEATURES

PX WALL offers you a wide range of looks and structures. While the backing material is always made from thermally treated pine, the surfaces are treated differently to one another and prepared elaborately by hand. After the mechanical structure is generated with

techniques such as brushing, chopping or sawing, the product is finally treated in a high-quality water-based paint. Be inspired and give your home an unmistakable look.



Surface: Saw cut with C20 light grey paint application



Surface: Brushed with C16 sky blue paint application



Surface: Chopped with C32 hazel brown paint application



Surface: Brushed with C31 white paint application with a flaky look

# APPLICATION EXAMPLES AND INTERIOR SETTINGS OF SELF-ADHESIVE WOOD WALL COVERINGS



C32 hazel brown chopped




### SIMPLY STICK ON

The back side has been fitted with three strips of extra sticky double-sided adhesive tape at the factory.




### A NATURAL WALL COVERING WITH CHARACTER

-  **AUTHENTIC VINTAGE SURFACES**
-  **EASY TO INSTALL**
-  **PEEL AND STICK INSTALLATION**
-  **FOR REAL, STRUCTURED PINE WOOD**
-  **LIGHT AND EASY TO TRANSPORT**
-  **SHAPE STABILITY THANKS TO THERMAL TREATMENT**
-  **NON-TOXIC, NO SMELL**

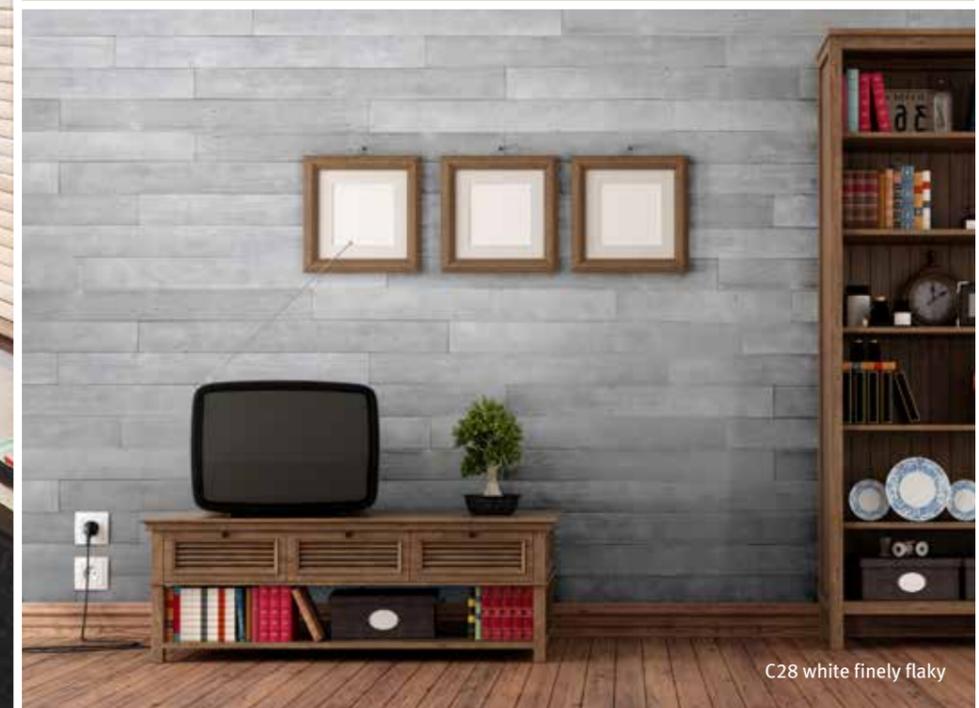

C28 white finely flaky

SELF-ADHESIVE WOOD WALL COVERINGS COLLECTION

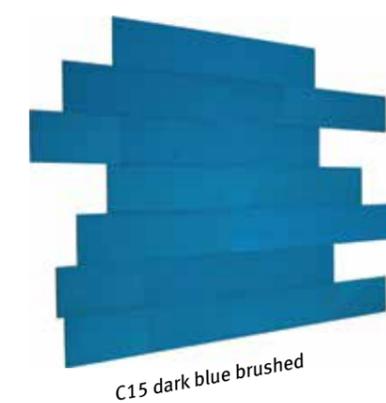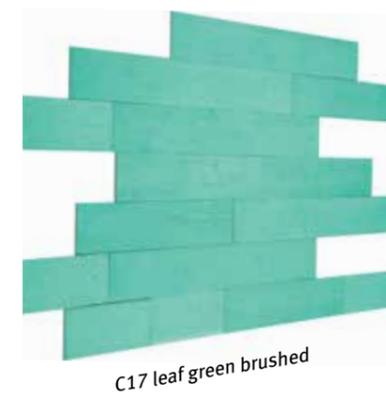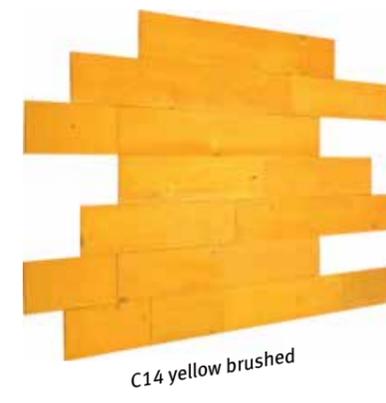

## SELF-ADHESIVE WOOD WALL COVERINGS ARTICLE LIST

	COLOUR	STRUCTURE	CONTENT [M <sup>2</sup> ]	PACKAGES PER PALLET	PALLETS PER 20' GP CONTAINER	PALLETS PER 40' GP CONTAINER
	C02 - White	Brushed	1,584	112	20	42
	C31 - White	Roughly flaky	1,584	112	20	42
	C20 - Light grey	Saw cut	1,584	112	20	42
	C07 - Wenge	Brushed	1,584	112	20	42
	C15 - Dark blue	Brushed	1,584	112	20	42
	C13 - Dark green	Brushed	1,584	112	20	42
	C35 - Off white	Roughly brushed	1,584	112	20	42
	C18 - Sand	Saw cut	1,584	112	20	42
	C19 - Silver grey	Saw cut	1,584	112	20	42
	C28 - White	Finely flaky	1,584	112	20	42
	C06 - Brown	Brushed	1,584	112	20	42
	C04 - Pebble grey	Brushed	1,584	112	20	42
	C32 - Hazel brown	Chopped	1,584	112	20	42
	C22 - Dark brown	Saw cut	1,584	112	20	42
	C27 - Dark grey	Saw cut	1,584	112	20	42
	C16 - Sky blue	Brushed	1,584	112	20	42
	C17 - Leaf green	Brushed	1,584	112	20	42
	C14 - Yellow	Brushed	1,584	112	20	42

## SELF-ADHESIVE WOOD WALL COVERINGS ASSEMBLY INSTRUCTIONS

### PXWALL

#### Assembly instructions "Adhesive wall tiles"

Thank you for your purchase! It is important that you read the notes in this manual before installing these adhesive wall tiles. Failure to comply with the conditions stated herein will result in the warranty being null and void. Any damage to the product must immediately be made known at the point of sale, prior to assembly. The adhesive wall tiles are a natural product; consequently, any cracks, knots, spots of resin, variations in colour and vertical or horizontal deformations are not valid grounds for claims.

#### Important notes

The adhesive wall tiles are made of solid wood. This is why the grain of the wood differs from one wall tile to the next, and different shades of colour are normal. Wood reacts to ambient humidity; if there is a lot of humidity in the air, the wall tiles expand, and when the conditions are dry, they contract, as regards both width and thickness. This may cause cracks on the surfaces or at the grooves at the transitions, depending on the assembly. Each wall tile is a unique piece, and when the different tiles are put together, the result is truly authentic, giving your wall a distinctly 'vintage' look.

- The adhesive wall tiles can only be used on walls that are in heated interiors.
- The adhesive wall tiles cannot be used in areas where the temperature is sometimes very high (> 50 °C), such as near a chimney or in a sauna.
- The adhesive wall tiles can only be used in rooms in which the average humidity level is 40-65 % humidity relative to the air; this means that they cannot be located in wet areas such as bathrooms.
- The adhesive wall tiles cannot withstand freezing temperatures. A minimum temperature of 15 °C must be maintained.

The above conditions also apply regarding storage of the wall tiles, whether they are in their packaging or not.


- For a homogeneous result, during assembly you should mix together tiles from all boxes that have been fortuitously purchased.
- The wall tiles should be left for at least 48 hrs in the room in which you intend to put them up, in their original packaging, for acclimatization purposes.

#### Required equipment and preparation

1. The stages of assembly depend on the laying pattern chosen. Prior to assembly, sketch the pattern you want to see on your wall on a piece of paper, and work out how many wall tiles you need. Allow roughly 10% more tiles for the sections requiring cutting.



2. Test how well the tiles stick to the wall for a few days before completely covering the wall with tiles.



the adhesive wall tiles varies depending on the

b) It is possible to fit a wooden support tile to plastered walls in order to improve adhesiveness.



d) Walls that are painted or coated with primer must be completely dry and be sanded down (using 80-grit sandpaper) prior to assembly.

ices e.g. socket covers and turn off the electricity supply to avoid any risk of electrocution. If you are going to stick the tiles onto are straight, dry and free of nails and other unwanted objects. Before going to stick the tiles onto with a dry cloth. Do not use any oil or grease. During assembly and use the prescribed protective equipment during

## SELF-ADHESIVE WOOD WALL COVERINGS LOGISTICS

### DIMENSIONS

- Package: 1210x137x60 mm, 3.3 kg
- Pallet: 122x98x108 cm, 112 packages, 385 kg
- 20' GP container: 20 pallets
- 40' GP container: 42 pallets

### MIXED LOADS

- Products can be combined as mixed loads as follows:
- Full DAP container: 20' or 40' container
  - Full pallets of one variety, from the Europe warehouse
  - Full mixed pallets with 2 – 6 different colours, from the Europe warehouse

### PACKAGING




## SELF-ADHESIVE WOOD WALL COVERINGS POINT OF SALES

Choose your ideal POS solution to offer your customers the best possible purchase experience. In collaboration with innovative developers and producers, PRODUX offers hand-picked and elegant customized solutions, to fulfil the specific requirements of every single customer. PX WALL solid wood wall coverings are excellently

suited to a pallet presentation in an open space. For this, we have mixed pallets with cartons in a maximum of six different colours. All six colours are presented on the displays supplied and ready-to-assemble in real sample areas. The colours can be determined and combined individually.

### EXAMPLE POS MIXED PALLETS

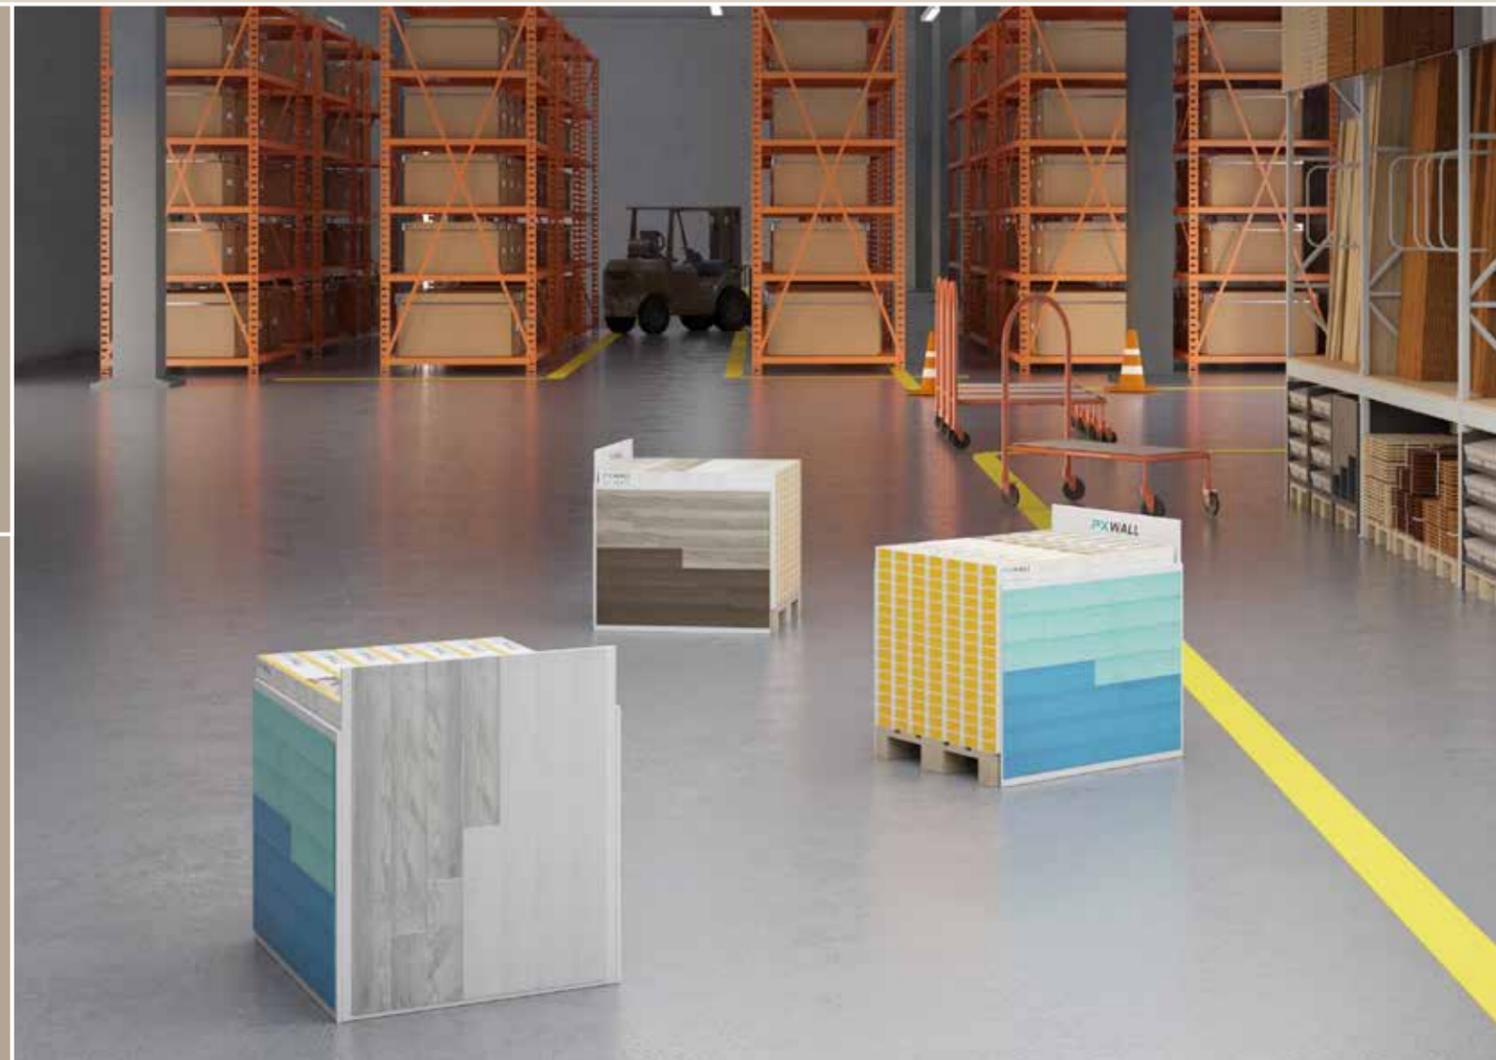



**PUBLISHER**

PRODUX concepts & services AG  
Phone: +41 (0)62 959 90 90 | Fax: +41 (0)62 959 90 99  
[www.produx.ch](http://www.produx.ch) | [info@prodex.ch](mailto:info@prodex.ch)

**CONCEPT/TEXT/DESIGN/LAYOUT**

Subject to change. Colours and graphics may deviate due to printing technology.

**VERSION**

October 2019 / English