



**PXFLOOR™**  
**DESIGNER VINYL FLOORING**

---





**PX** Floor is synonymous with profitability. As a direct importer, we allow you to pay low prices without having to compromise on quality. The entire collection is equipped with extra-thick wear layers and paves the way for applications in the commercial and light industrial sectors.

The different decors (styles, colors and surface embossings) have proven themselves in the market and are carefully selected to match the latest trends in decoration. The entire collection is available with an extra matte finish, which offers an incomparable and exclusive surface.


We offer large customers the possibility to create their own range of floor coverings. This way you can give the products the best market launch under your own brand and enjoy independence and exclusivity. We will be happy to support you in the complete management of your product range!

Oak Semra

## CONTENTS

PAGE	SUBJECT
04	PRODUCT OVERVIEW
	DESIGNER COVERINGS MADE OF VINYL
06	PX FLOOR GLUEDOWN
08	PX FLOOR CLASSIC
10	PX FLOOR S-CORE®
12	PX FLOOR L-CORE® QUIET
14	COLLECTION
16	PRODUCT OVERVIEW
18	APPLICATION AREAS
19	EMBOSSING
20	FORMATS AND CLICK SYSTEMS
21	TECHNICAL CHARACTERISTICS
24	ACCESSORIES

CHARACTERISTICS OF  
PX FLOOR DESIGN COVERINGS

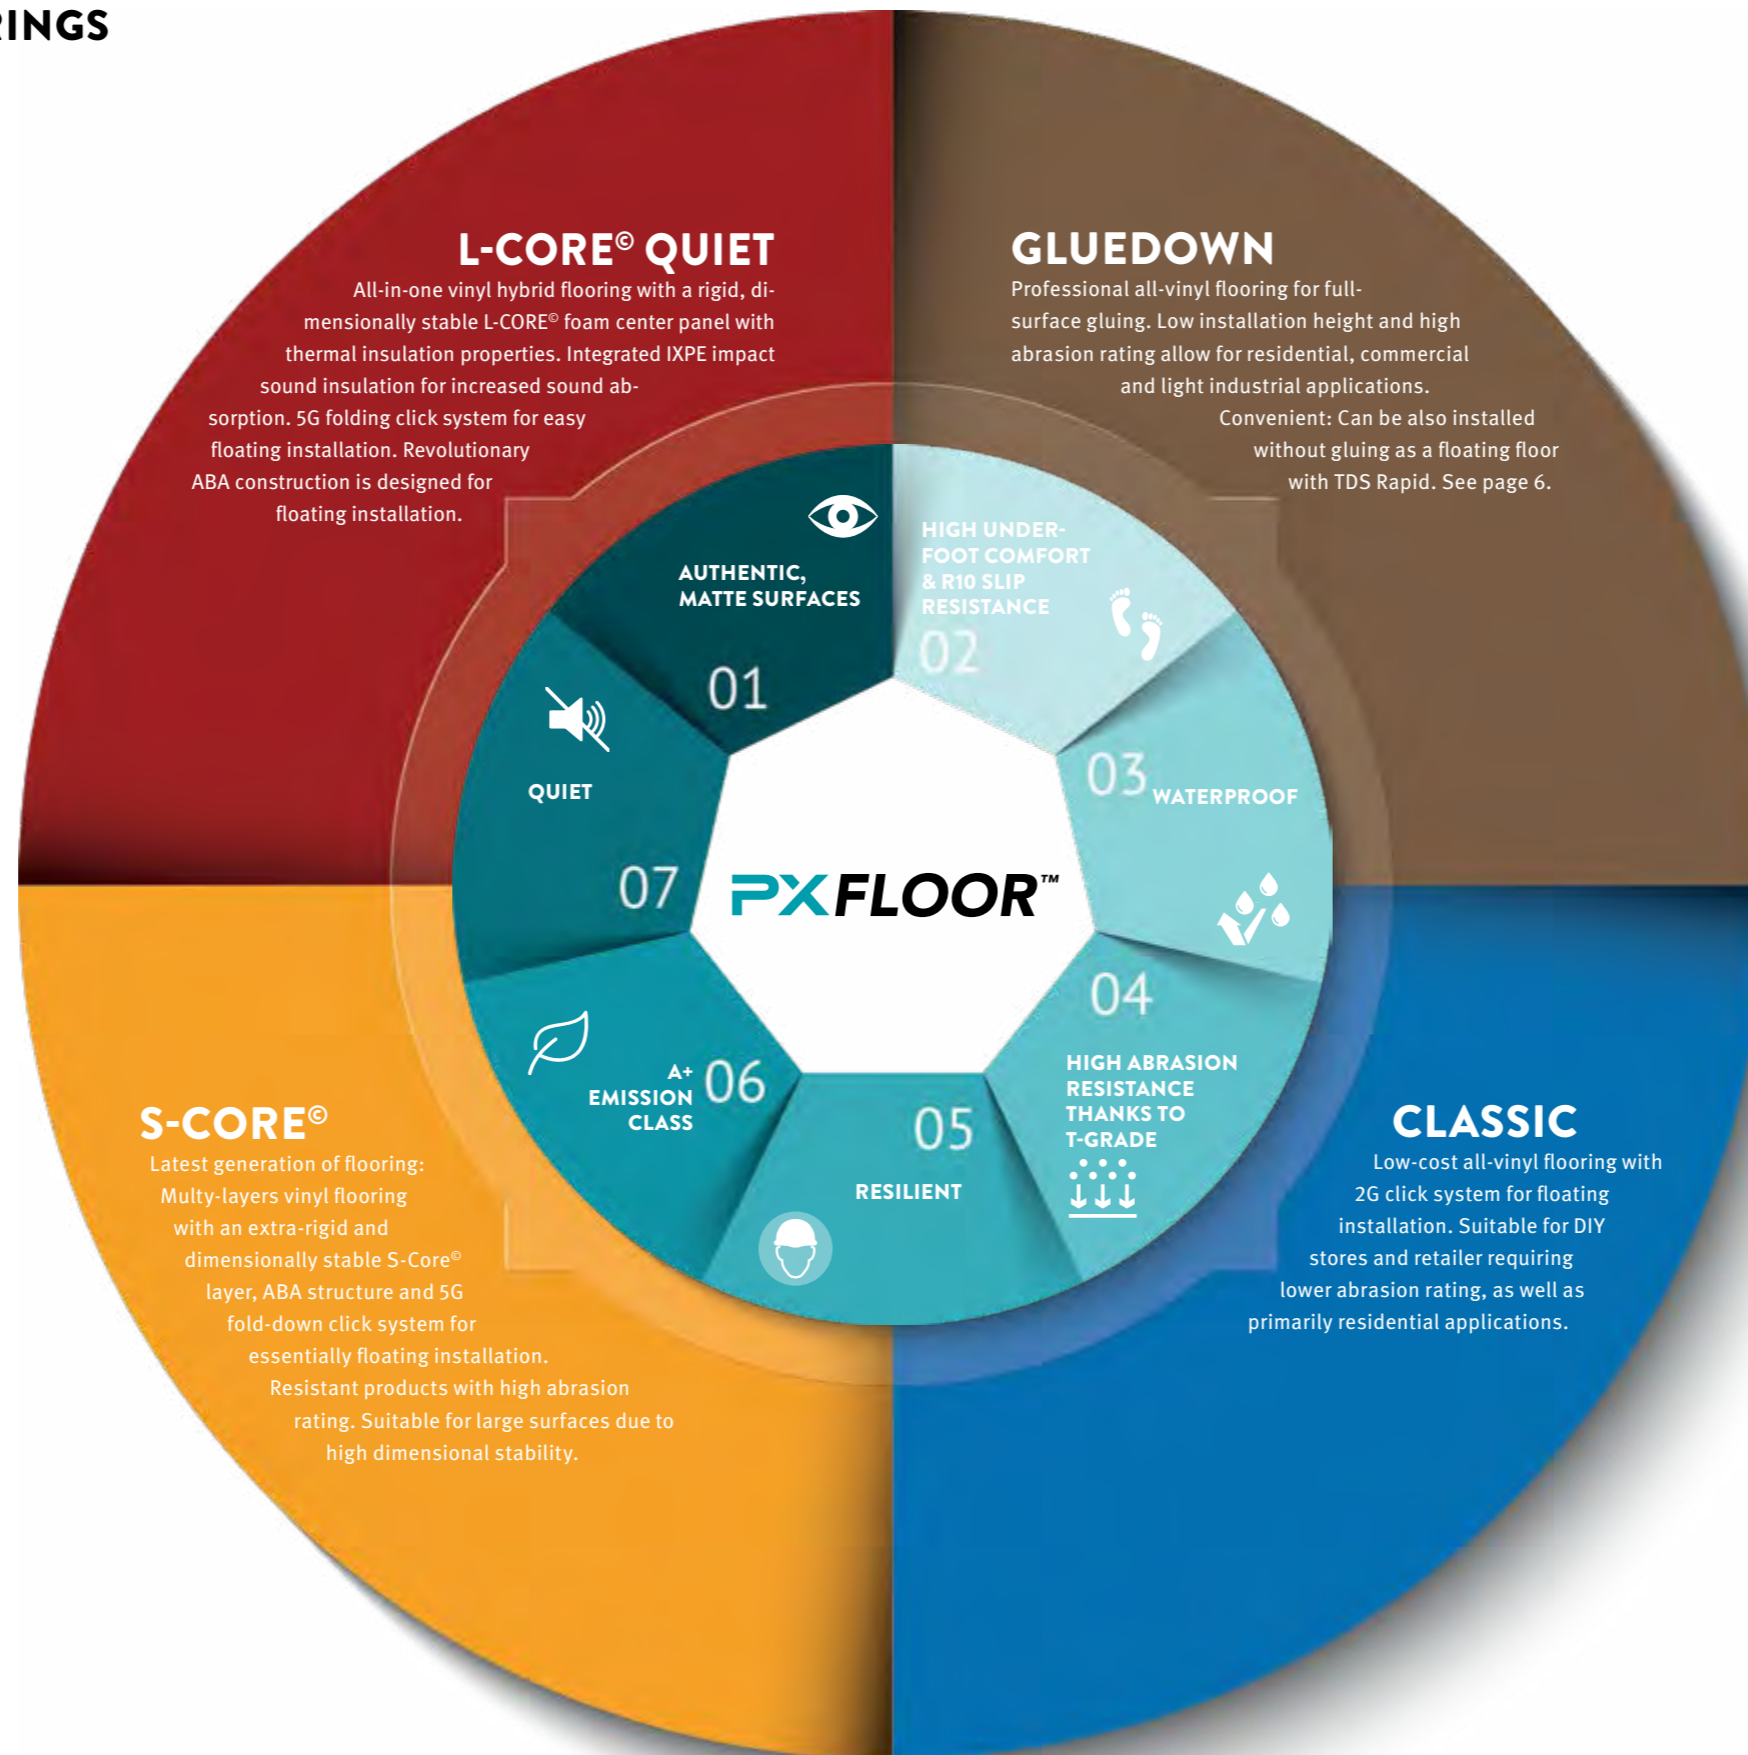


## PX FLOOR GLUEDOWN

### OVERVIEW

Professional all-vinyl flooring for full-surface gluing. Low installation height and high abrasion rating allow for residential, commercial and light industrial applications. Convenient: Can be also installed without gluing as a floating floor with TDS Rapid.

- 1 UV matte paint coating
- 2 T-class wear layer with structure embossing
- 3 High-pressure printed decorative film
- 4 Fiberglass-reinforced vinyl balancing backer

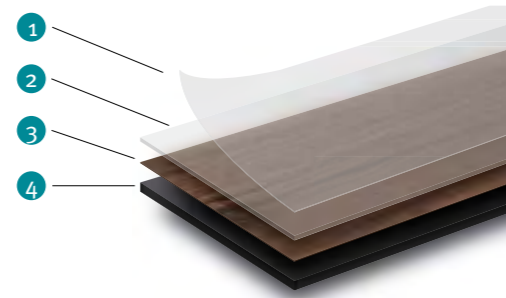

### STRUCTURE, APPLICATION, GUARANTEE AND FORMAT

#### 2.5/0.55 MM


2.5 mm total thickness, 0.55 mm wear layer



20-year guarantee




5-year guarantee




2-year guarantee

#### WOOD DECOR

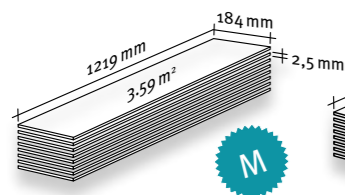

16 pieces

#### STONE DECOR

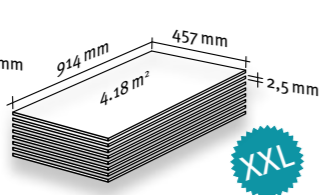

10 pieces



### TECHNICAL CHARACTERISTICS



Water-resistant



Pleasant underfoot feel




Underfloor heating possible



Anti-slip



Low flammability



Suitable for renovation



Resistant to household agents




Easy-care




Full-surface gluing

## PROFESSIONAL FLOORING FOR FULL-SURFACE GLUING AND HIGH WEAR RESISTANCE.

Oak Graham

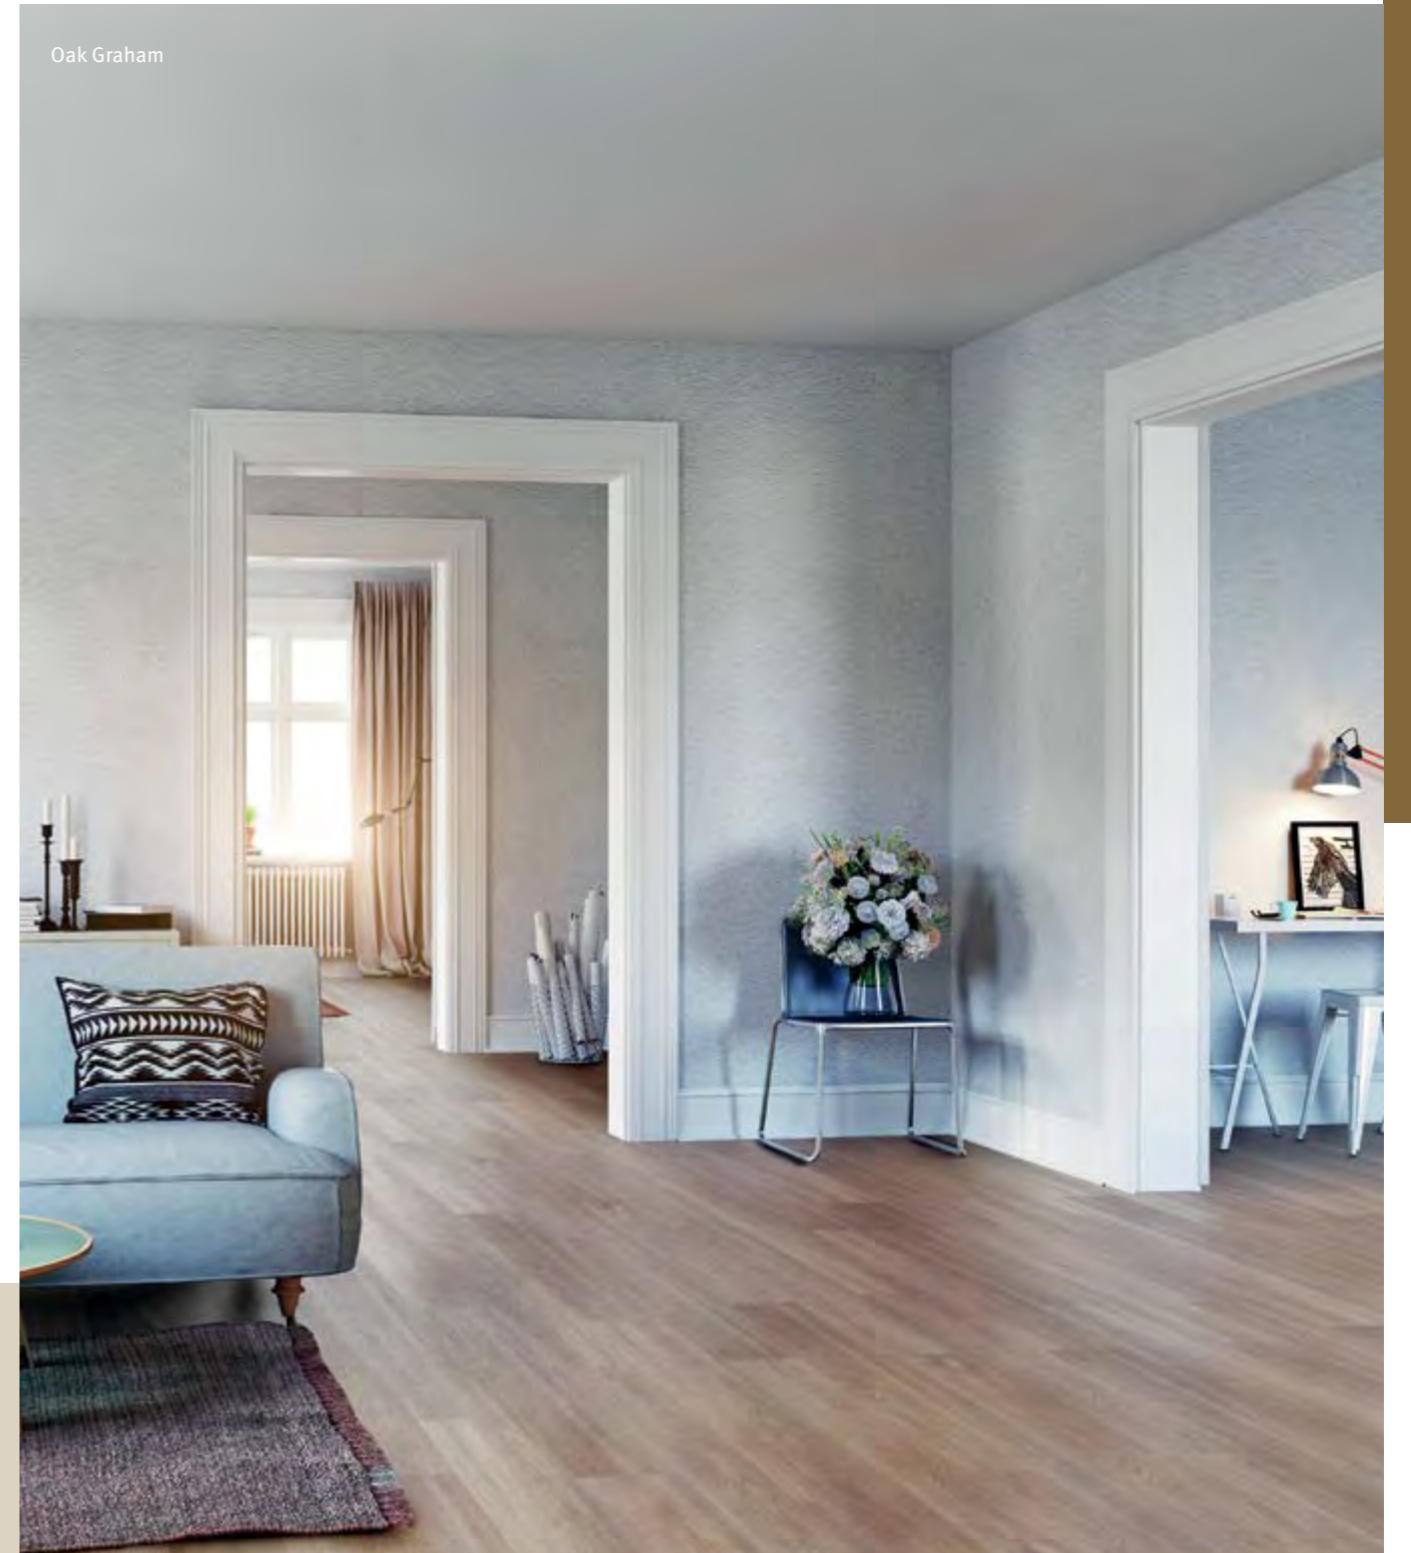

VOLLFLÄCHIG VERKLEBEN  
POSE COLLÉE EN PLEIN  
POSA INCOLLATA



WASSERBESTÄNDIG  
IMPERMÉABLE  
IMPERMEABILE



EMISSIONEN IN DER RAUMLUFT  
ÉMISSIONS DANS L'AIR AMBIANT  
LE EMISSIONI IN ARIA INTERNA



GLUEDOWN


PX FLOOR™

## PX FLOOR CLASSIC

### OVERVIEW

Low-cost all-vinyl flooring with 2G click system for floating installation. Suitable for DIY stores and retailer requiring lower abrasion rating, as well as primarily residential applications.

- 1 UV matte paint coating
- 2 T-class wear layer with structure embossing
- 3 High-pressure printed decorative film
- 4 Fiberglass-reinforced vinyl layer
- 5 Fiberglass-reinforced vinyl balancing backer

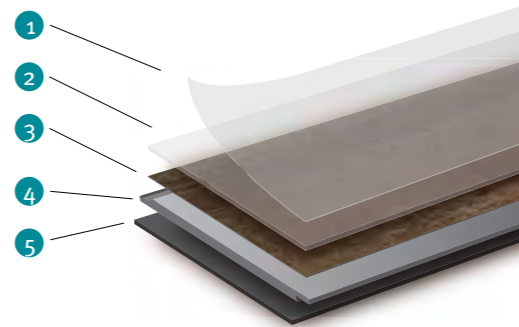

### STRUCTURE, APPLICATION, GUARANTEE AND FORMAT

#### 4.0/0.30 MM

4.0 mm total thickness, 0.30 mm wear layer




15-year guarantee




5-year guarantee

#### WOOD DECOR



10 pieces

#### STONE DECOR



12 pieces

#### 5.0/0.50 MM

5.0 mm total thickness, 0.50 mm wear layer




20-year guarantee




5-year guarantee

#### WOOD DECOR




8 pieces

#### STONE DECOR



10 pieces

### TECHNICAL CHARACTERISTICS

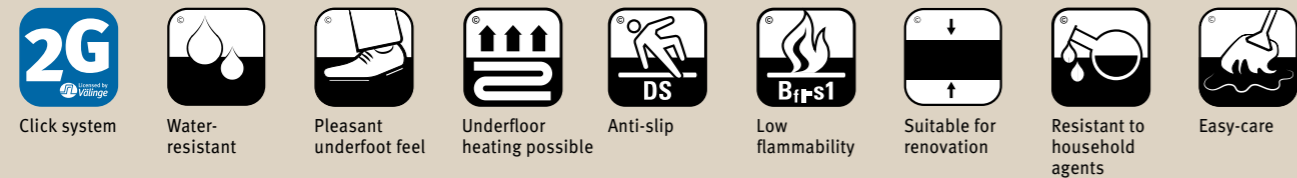

## CLASSIC ALL-VINYL CLICK FLOOR COVERING FOR FLOATING INSTALLATION AND GOOD WALKING COMFORT.




Dimensionally stable

## PX FLOOR S-CORE®

### OVERVIEW

Latest generation of flooring: Multi-layers vinyl flooring with an extra-rigid and dimensionally stable S-Core® layer, ABA structure and 5G fold-down click system for essentially floating installation. Resistant products with high abrasion rating. Suitable for large surfaces due to high dimensional stability.

- 1 UV matte paint coating
- 2 T-class wear layer with structure embossing
- 3 High-pressure printed decorative film
- 4 Fiberglass-reinforced vinyl layer
- 5 Dimensionally stable S-Core® layer
- 6 Fiberglass-reinforced vinyl balancing backer

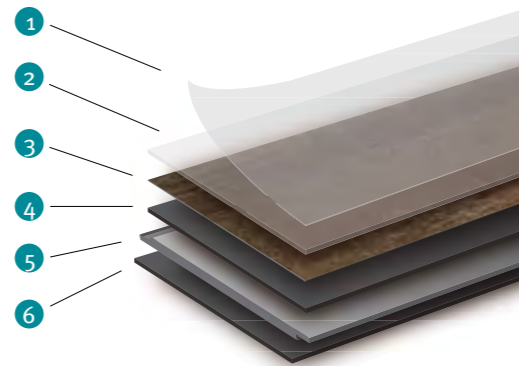

### STRUCTURE, APPLICATION, GUARANTEE AND FORMAT


#### 6.5/0.70 MM

6.5 mm total thickness, 0.70 mm wear layer




#### WOOD DECOR

#### STONE DECOR

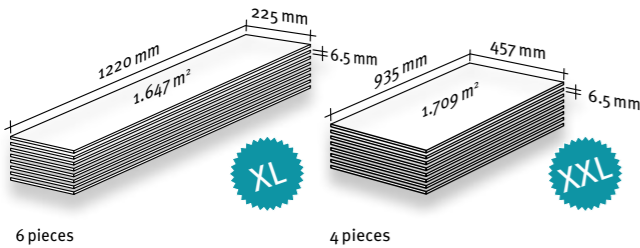

### TECHNICAL CHARACTERISTICS

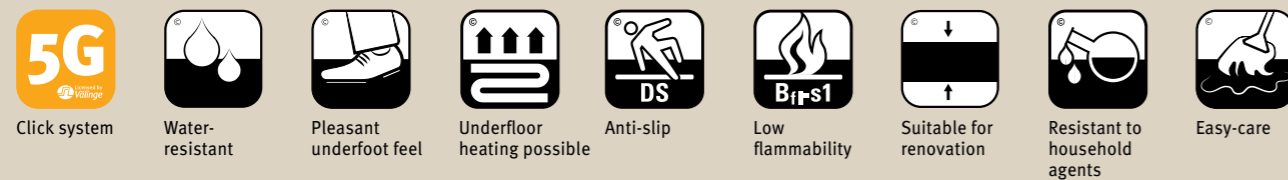

CLICK PROFESSIONAL VINYL FLOORING WITH RIGID S-CORE® LAYER. SUITABLE FOR FLOATING INSTALLATION AND ESPECIALLY FOR LARGE ROOMS.



5G  
Licensed by Vålinge

WASSERBESTÄNDIG  
IMPERMÉABLE  
IMPERMEABILE

100%

EMISSIONEN IN DER RAUMLUFT  
ÉMISSIONS DANS L'AIR AMBIANT  
LE EMISSIONI IN ARIA INTERNA

A+  
A+ A B C

S-CORE®

PX FLOOR™


## PX FLOOR L-CORE®

Sound-insulating  
Dimensionally stable

### OVERVIEW

All-in-one vinyl hybrid flooring with a rigid, dimensionally stable L-CORE® foam center panel with thermal insulation properties. Integrated IXPE impact sound insulation for increased sound absorption. 5G folding click system for easy floating installation. Revolutionary ABA construction is designed for floating installation.

- 1 UV matte paint coating
- 2 T-class wear layer with structure embossing
- 3 High-pressure printed decorative film
- 4 Fiberglass-reinforced vinyl layer
- 5 Dimensionally stable L-CORE® foam layer with thermal insulation properties
- 6 IXPE impact sound insulation underlay

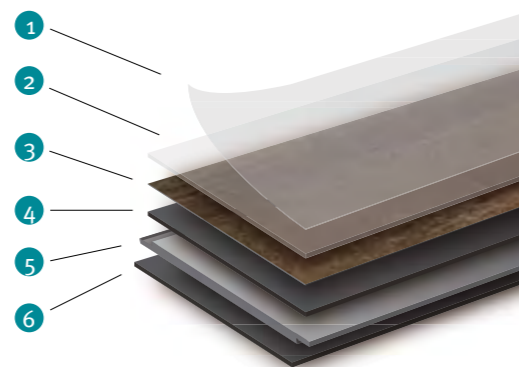

### STRUCTURE, APPLICATION, GUARANTEE AND FORMAT

#### L-CORE® QUIET 7.5 (6.5+1)/0.55 MM


7.5 mm total thickness, 0.55 mm wear layer



25-year guarantee




5-year guarantee



2-year guarantee


Footfall sound insulation

#### WOOD DECOR



8 pieces

#### STONE DECOR



6 pieces



### TECHNICAL CHARACTERISTICS



Click system



Built-in footfall sound insulation



Water-resistant



Pleasant underfoot feel




Underfloor heating possible



Anti-slip



Low flammability



Suitable for renovation



Resistant to household agents

ALL-IN-ONE CLICK FLOORING FOR FLOATING INSTALLATION AND INTEGRATED SOUND INSULATION UNDERLAY AND REGISTERED EMBOSSED.



Sandstone Nola

5G  
Licensed by Vålinge

WASSERBESTÄNDIG  
IMPERMEABLE  
IMPERMEABLE

100%


EMISSIONEN IN DER RAUMLUFT  
ÉMISSIONS DANS L'AIR AMBIANT  
LE EMISSIONI IN ARIA INTERNA

A+  
A+ A B C

L-CORE® QUIET

PX FLOOR™

# OVERVIEW PX FLOOR COLLECTION

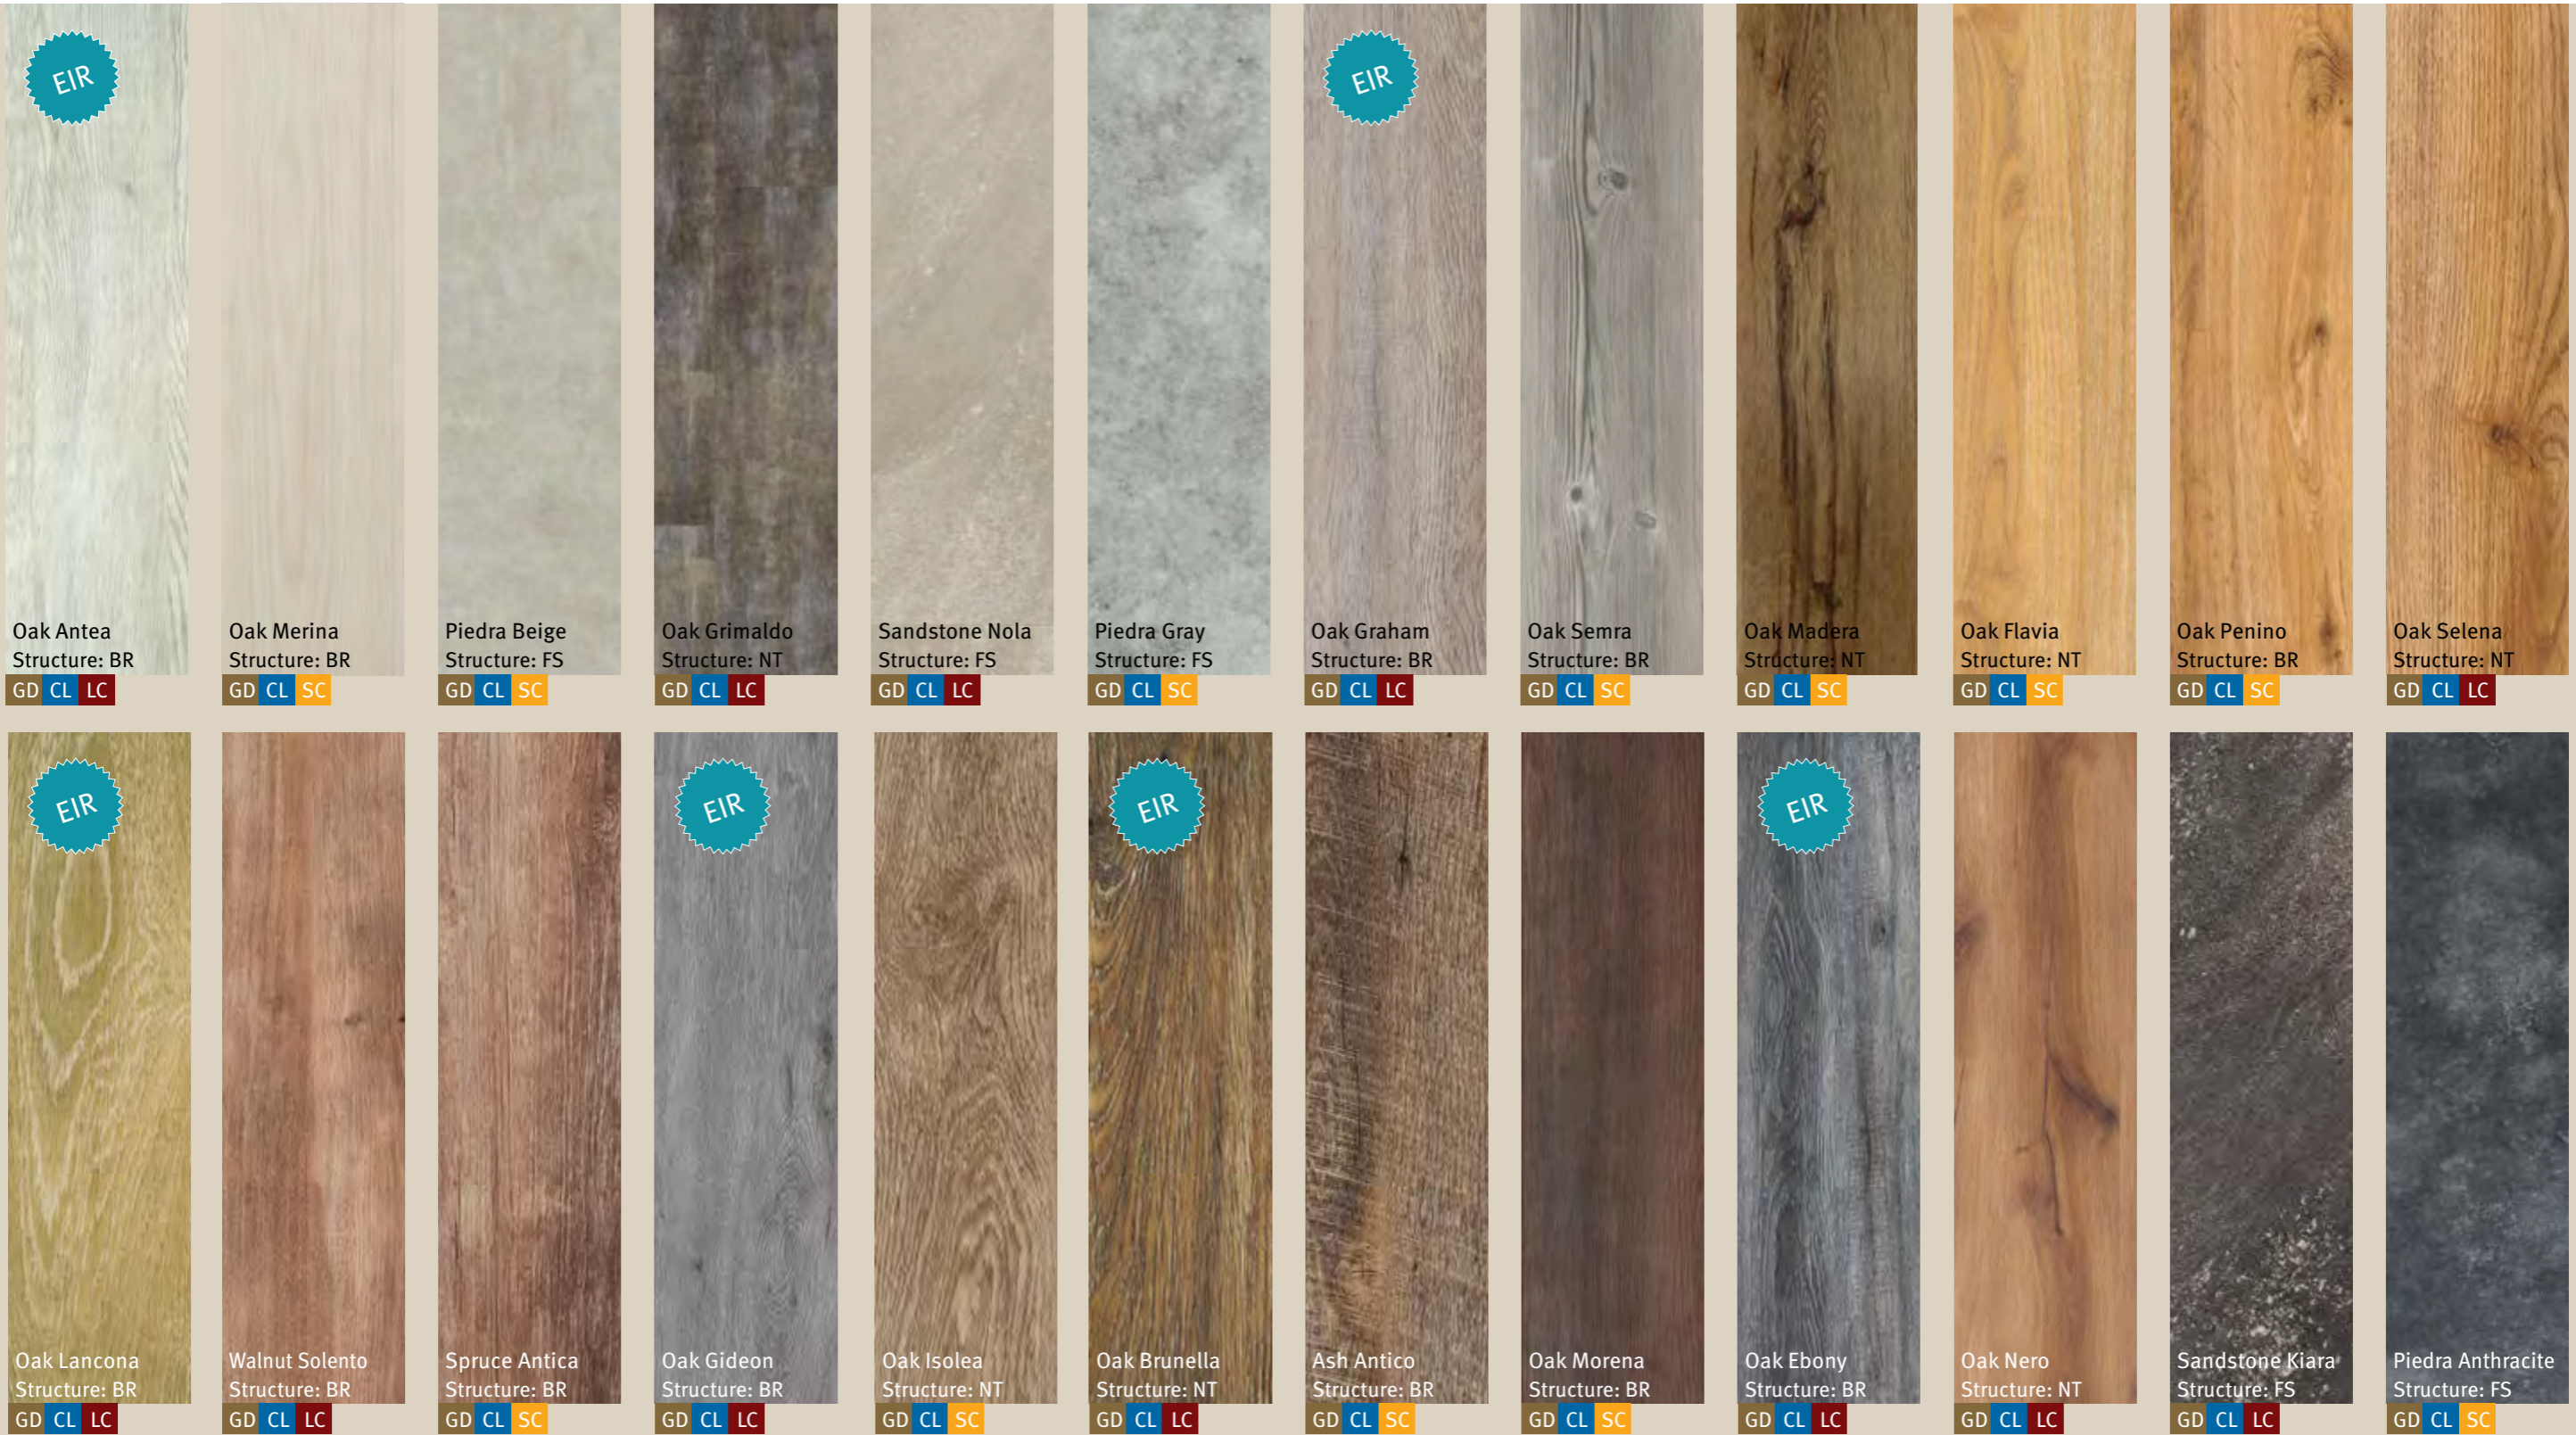

EIR: Registered embossing; GD: Gluedown; CL: Classic; SC: S-Core; LC: L-Core; the description of the surface texture is available on page 19.



# OVERVIEW

## PX FLOOR PRODUCT OVERVIEW

	Product family	GLUEDOWN		CLASSIC				S-CORE®		L-CORE® QUIET	
		Full-surface gluing		Floating				Floating/full-surface gluing		Floating	
Total thickness/wear layer in mm		2.5/0.55		4.0/0.30		5.0/0.50		6.5/0.70		6.5+1/0.55	
Use classes		23/33/42		23/31		23/32		23/34/43		23/33/41	
Click system		-		2G				5G		5G	
Dimensions in mm		1219 x 184	914 x 457	1220 x 179	600 x 307	1210 x 220	600 x 307	1220 x 225	935 x 457	1420 x 225	935 x 457
Content in m <sup>2</sup> /number of planks or tiles		3.59/16	4.18/10	2.18/10	2.21 / 12	2.13/8	1.84/10	1.647/6	1.709/4	2.56/8	2.56/6
Pack per pallets/pallets per 20' containers		80/18	60/20	40/34	48 / 28	40/28	48/27	60/18	58/18	32/21	40/18
Oak Antea		● 207076		● 207129		● 207166				● 207093	
Oak Merina	● 206955			● 207128		● 207165		● 208294			
Piedra Beige			● 206992		● 207146		● 207160		● 208295		
Oak Grimaldo			● 209426		● 209429		● 209428				● 209427
Sandstone Nola			● 206995		● 207149		● 207163				● 207157
Piedra Gray			● 206993		● 207147		● 207161		● 208296		
Oak Graham		● 207077		● 207130		● 207167				● 207094	
Oak Semra		● 209390		● 209396		● 209399		● 209430			
Oak Madera		● 209392		● 209398		● 209401		● 209394			
Oak Flavia	● 206961			● 207131		● 207168		● 208297			
Oak Penino	● 206987			● 207132		● 207169		● 208298			
Oak Selena		● 207089		● 207144		● 207183				● 207121	
Oak Lancona		● 207078		● 207133		● 207170				● 207099	
Walnut Solento		● 207084		● 207139		● 207178				● 207111	
Spruce Antica	● 206990			● 207135		● 207173		● 208299			
Oak Gideon		● 207081		● 207159		● 207175				● 207105	
Oak Isolea		● 207085		● 207140		● 207179		● 209431			
Oak Brunella		● 207079		● 207134		● 207172				● 207100	
Ash Antico		● 207088		● 207143		● 207182		● 209395			
Oak Morena		● 207082		● 207137		● 207176		● 209432			
Oak Ebony		● 207080		● 207136		● 207174				● 207104	
Oak Nero		● 209391		● 209397		● 209400				● 207117	
Sandstone Kiara			● 206996		● 207150		● 207164				● 207158
Piedra Anthracite			● 206994		● 207148		● 207162		● 208300		

● Stock range; ● Order range available upon inquiry; EIR: Registered embossing

## OVERVIEW PX FLOOR APPLICATION AREAS

Classes according to DIN EN ISO 10874				
Classification of elastic, textile and laminate floor coverings				
Use class	Corresponding abrasion class	Intensity	Explanations, examples	PX FLOOR
<b>Private use (residential)</b>				
21	AC 1	Moderate	Low-use living spaces such as bedrooms	
22	AC 2	Normal	Normal-use living spaces such as kitchens, workrooms	
23	AC 3	High	High-use living spaces such as kitchens, corridors, hobby rooms	GLUEDOWN, LOOSELAY, CLASSIC, S-CORE®, L-CORE®
<b>Public and commercial use</b>				
31	AC 3	Moderate	Hotel rooms, individual offices, meeting rooms	CLASSIC
32	AC 4	Normal	Hotel corridors, offices, waiting rooms, classrooms, small shops	CLASSIC
33	AC 5	High	Open-plan offices, multipurpose halls, schools, stores, hotel lobbies	GLUEDOWN, L-CORE®
34	AC 6	Very high	Multipurpose halls, stores, ticket halls, airports	GLUEDOWN, LOOSELAY, S-CORE®
<b>Uses in light industry</b>				
41	AC 4	Moderate	Rooms for predominantly sedentary activities, e.g. precision mechanics workshops	L-CORE®
42	AC 5	Normal	Areas for standing activities, areas used by vehicles, storage rooms	GLUEDOWN
43	AC 6	High	Areas for industrial activities, e.g. production workshops	GLUEDOWN, LOOSELAY, S-CORE®



Private area  
High traffic



Public area  
Low traffic




Public area  
Normal level of traffic




Public area  
High traffic




Public area  
Very high traffic



Industrial area  
Low traffic



Industrial area  
Normal traffic



Industrial area  
High traffic


## OVERVIEW PX FLOOR EMBOSSING

### EMBOSSING

The structure of the surface emphasizes the authenticity of the decors and adapts to the type of floor.




Structure registered embossing (EIR)

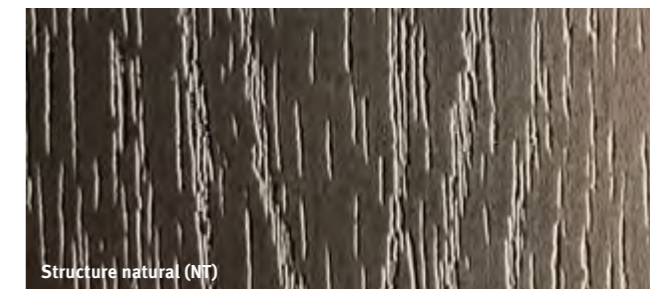


Structure natural (NT)



Structure brushed (BR)

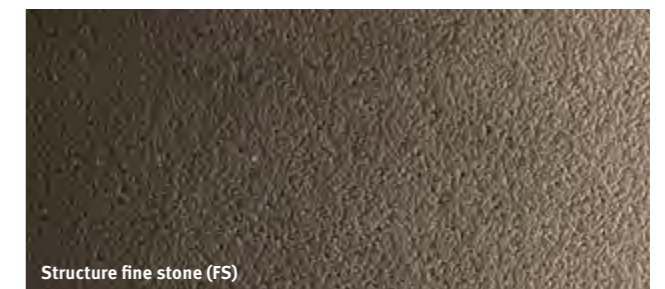

Structure fine stone (FS)

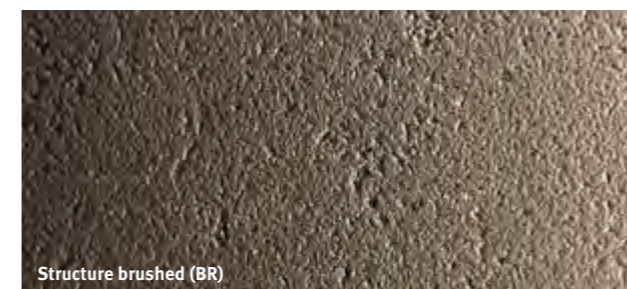

Structure brushed (BR)



## OVERVIEW

### PX FLOOR FORMATS AND CLICK SYSTEMS

#### FORMATS

With PX FLOOR you do not have to put up with any compromises.

The right decor in the right format for every room.

Approx. 1422 x 228 mm

**WOOD DECORS**

Approx. 1219 x 184 mm

Approx. 914 x 457 mm

**STONE DECORS**

600 x 307 mm

#### CLICK SYSTEMS

Click systems allow for glueless assembly and therefore simplified removal after its useful life has ended. Flooring with a click mechanism does not require specialized knowledge for installation.



Välinge's patented snap-in mechanism. This inexpensive snap-in system

requires the short sides of the boards to be snapped in first before the long sides of the boards are snapped in.



Välinge's patented snap-in mechanism. The simplest click system on the market is the fold-down

mechanism and it works with a plastic spring that snaps onto the short side of the board. 5G allows the installer to connect each board individually to other boards.

Spruce Vintage Grey



## OVERVIEW TECHNICAL CHARACTERISTICS

PXFLOOR floor coverings are subject to strict quality guidelines that go well beyond the legal requirements. The listed values are guidance values; you will find specific information on our data sheets.

		GLUEDOWN	CLASSIC		S-CORE®	L-CORE® QUIET
NORM						
Thickness/wear layer [mm]		2.5/0.55	4.0/0.30	5.0/0.50	6.5/0.70	6.5+1/0.55
Grammage [kg/m²]	EN 430	4.5	8.3	10.3	13.0	8.25
Dimensional change and classification	EN 434	≤0.25%				
Fire behavior	EN 13501	Bfl -s1 (flame retardant)				
Skid resistance	DIN 51130	R10				
	EN 13893	DS				
Wear group	EN 660	T				
Wear class	ISO 10582	see page 6	see page 10	see page 12	see page 14	
Stain susceptibility	EN 423	Class o				
Castor chair test	EN 425	exceeds 25'000 roller turns				
Resistance to marking (permanent load)	EN 433	≤0.1 mm				
Lightfastness	ISO 105 B02	≥6				
Formaldehyde emission class	EN 717-1	E1				
	EN ISO 16000	A+				

### TECHNICAL CHARACTERISTICS OF ALL PRODUCTS



Easy-care



Resistant to household agents



Anti-slip



Lowest pollutant emission



Low flammability



Water-resistant



Pleasant underfoot feel

### PRODUCT-SPECIFIC TECHNICAL CHARACTERISTICS



Click system



Click system




Built-in footfall sound insulation



Underfloor heating possible



Fast installation



Suitable for renovation



# ACCESSORIES BASEBOARDS

## BASEBOARDS

A perfect finish. The water-resistant plastic baseboard with digital printing and optional invisible mounting clip. All-in-one corner sticks. One product with three functions: Baseboard end, inner corner or outer corner.



### BOARD CLIP CH 23



**PX ART.**  
205047

**DESCRIPTION**  
Mounting clip for invisible mounting of baseboards by means of vertical plug-in system

**PACKAGING UNIT**  
30 pcs. per pack; ; 1 pack yields ca. 15 m<sup>2</sup>

PX ART.	PRODUCT	DESIGNATION	DIMENSION	PACKAGING UNIT	CORNER STICK PX ART.	DIMENSION	PACKAGING UNIT
205272	Baseboard KU014L	Oak Antea	2400 x 58 x 13.5 mm	10 pcs. per pack	207279	62 x 18 x 18 mm	2 pcs. per pack
205271	Baseboard KU014L	Oak Brunella	2400 x 58 x 13.5 mm	10 pcs. per pack	207280	62 x 18 x 18 mm	2 pcs. per pack
207277	Baseboard KU014L	Oak Ebony	2400 x 58 x 13.5 mm	10 pcs. per pack	207281	62 x 18 x 18 mm	2 pcs. per pack
205027	Baseboard KU014L	Oak Flavia	2400 x 58 x 13.5 mm	10 pcs. per pack	206612	62 x 18 x 18 mm	2 pcs. per pack
207278	Baseboard KU014L	Oak Gideon	2400 x 58 x 13.5 mm	10 pcs. per pack	207282	62 x 18 x 18 mm	2 pcs. per pack
206254	Baseboard KU014L	Oak Graham	2400 x 58 x 13.5 mm	10 pcs. per pack	206628	62 x 18 x 18 mm	2 pcs. per pack
205026	Baseboard KU014L	Oak Grimaldo	2400 x 58 x 13.5 mm	10 pcs. per pack	206611	62 x 18 x 18 mm	2 pcs. per pack
205032	Baseboard KU014L	Oak Isolea	2400 x 58 x 13.5 mm	10 pcs. per pack	206616	62 x 18 x 18 mm	2 pcs. per pack
205270	Baseboard KU014L	Oak Lancona	2400 x 58 x 13.5 mm	10 pcs. per pack	207283	62 x 18 x 18 mm	2 pcs. per pack
209187	Baseboard KU014L	Oak History	2400 x 58 x 13.5 mm	10 pcs. per pack	206617	62 x 18 x 18 mm	2 pcs. per pack
206253	Baseboard KU014L	Oak Merina	2400 x 58 x 13.5 mm	10 pcs. per pack	206630	62 x 18 x 18 mm	2 pcs. per pack
206250	Baseboard KU014L	Oak Morena	2400 x 58 x 13.5 mm	10 pcs. per pack	206629	62 x 18 x 18 mm	2 pcs. per pack
205028	Baseboard KU014L	Oak Nero	2400 x 58 x 13.5 mm	10 pcs. per pack	206613	62 x 18 x 18 mm	2 pcs. per pack
205037	Baseboard KU014L	Oak Penino	2400 x 58 x 13.5 mm	10 pcs. per pack	206619	62 x 18 x 18 mm	2 pcs. per pack
205031	Baseboard KU014L	Oak Selena	2400 x 58 x 13.5 mm	10 pcs. per pack	206615	62 x 18 x 18 mm	2 pcs. per pack
209185	Baseboard KU014L	Spruce Vintage Grey	2400 x 58 x 13.5 mm	10 pcs. per pack	206627	62 x 18 x 18 mm	2 pcs. per pack
205029	Baseboard KU014L	Ash Antico	2400 x 58 x 13.5 mm	10 pcs. per pack	206614	62 x 18 x 18 mm	2 pcs. per pack
205036	Baseboard KU014L	Walnut Solento	2400 x 58 x 13.5 mm	10 pcs. per pack	206618	62 x 18 x 18 mm	2 pcs. per pack
205041	Baseboard KU014L	Piedra Anthracite	2400 x 58 x 13.5 mm	10 pcs. per pack	206621	62 x 18 x 18 mm	2 pcs. per pack
205038	Baseboard KU014L	Piedra Beige	2400 x 58 x 13.5 mm	10 pcs. per pack	206620	62 x 18 x 18 mm	2 pcs. per pack
205044	Baseboard KU014L	Piedra Gray	2400 x 58 x 13.5 mm	10 pcs. per pack	206624	62 x 18 x 18 mm	2 pcs. per pack
205043	Baseboard KU014L	Sandstone Kiara	2400 x 58 x 13.5 mm	10 pcs. per pack	206623	62 x 18 x 18 mm	2 pcs. per pack
205042	Baseboard KU014L	Sandstone Nola	2400 x 58 x 13.5 mm	10 pcs. per pack	206622	62 x 18 x 18 mm	2 pcs. per pack
205046	Baseboard KU014L	Silver	2400 x 58 x 13.5 mm	10 pcs. per pack	206626	62 x 18 x 18 mm	2 pcs. per pack
205045	Baseboard KU014L	White	2400 x 58 x 13.5 mm	10 pcs. per pack	206625	62 x 18 x 18 mm	2 pcs. per pack
206251	Baseboard KU014L	Spruce Antica	2400 x 58 x 13,5 mm	10 pcs. per pack	206631	62 x 18 x 18 mm	2 pcs. per pack

# ACCESSORIES FLOORING INSTALLER MATERIAL

## FLOOR UNDERLAYS



PX ART.	PRODUCT	DESIGNATION	EMISSION	PALLET/ CONTAINER SIZE	PACKAGING UNIT	CONSUMPTION	DESCRIPTION
207275	Footfall sound insulation self-adhesive for GLUEDOWN	PX-VINLAY RAPID HD, 500 kPa, 1.8 mm	A+ A+ A B C	40 rolls, 6.5 x 1 m	Rolls single	/	Self-adhesive floating underlayment with impact sound insulation for GLUEDOWN flooring with full gluing surface. Allows bonding to existing subfloors for renovations and construction, and can be walked on immediately after bonding. No specialized knowledge is required for installation. Product with integrated vapour barrier.
207554	Footfall sound insulation, floating installation	PX-VINCLIC SOLID, 500 kPa, 1.1 mm	A+ A+ A B C	40 rolls, 9 x 1 m	Rolls single	/	Solvent-free, PUM-based underlayment, made from 90 % natural raw materials, suitable for all floating vinyl floors in the PX Floor range. Product with integrated vapor barrier.
207276	PX aluminum joint sealing tape			96 rolls per carton, 50 mm x 50 m	Rolls single	/	Self-adhesive aluminum sealing tape for bonding the underlayment transitions.

## BUILDING CHEMISTRY AND GLUES



PX ART.	PRODUCT	DESIGNATION	EMISSION	PALLET/ CONTAINER SIZE	PACKAGING UNIT	CONSUMPTION	DESCRIPTION
209054	Adhesive primer	UZIN PE 360 PLUS		72 x 12 kg	single	ca. 80 – 150 g/m <sup>2</sup>	Dispersion primer for absorbent substrates, screeds and concrete floors
209055	Quick repair compound	UZIN PE 280	ECT EMISIIONEN	50 x 12 kg	single	ca. 70 – 150 g/m <sup>2</sup>	Dispersion primer with carbon technology for smooth and dense substrates
209056	Adhesive primer	UZIN PE 460		30 x 10 kg	single	ca. 200 – 600 g/m <sup>2</sup> per layer	Epoxy resin primer for damp or unstable substrates
209057	Adhesive primer	UZIN PE 414 BiTurbo	ECT EMISIIONEN	56 x 12 kg	single	ca. 80 – 150 g/m <sup>2</sup> per layer	Ready-to-use, fast-setting, single-component polyurethane primer without plasticizing ingredients.
209050	Repair and leveling compound	UZIN NC 170 LevelStar		42 x 25 kg	single	ca. 1.5 kg/m <sup>2</sup> per mm layer thickness	Extremely smooth and fast self-leveling cement leveler with Level Plus Effect S for every layer thickness range
209051	Repair and leveling compound	UZIN NC 110	ECT EMISIIONEN	42 x 25 kg	single	ca. 1.5 kg/m <sup>2</sup> per mm layer thickness	Self-leveling, extremely smooth, calcium sulfate-based leveling compound with Level Plus Effect S for layer thicknesses up to 50 mm
209052	Repair and leveling compound	UZIN NC 175		42 x 25 kg	single	ca. 1.5 kg/m <sup>2</sup> per mm layer thickness	Self-leveling, fiber-reinforced cement leveling compound with Level Plus effect for layer thicknesses up to 20 mm
209053	Repair and leveling compound	UZIN NC 115	ECT EMISIIONEN	42 x 25 kg	single	ca. 1.5 kg/m <sup>2</sup> per mm layer thickness	Self-leveling, fiber-reinforced calcium sulfate leveling compound with Level Plus Effect S for layer thicknesses up to 30 mm
209046	Dispersion adhesive	UZIN KE 66		33 x 14 kg	single	ca. 240 – 280 g/m <sup>2</sup>	High shear PVC and rubber adhesive with rigid adhesive bead
209047	Dispersion adhesive	UZIN KE 2000 S	ECT EMISIIONEN	33 x 14 kg	single	ca. 180 – 380 g/m <sup>2</sup>	Universal adhesive for all common floor coverings
209048	One-component adhesive	UZIN KE 68		68 x 8.5 kg	single	ca. 250 – 450 g/m <sup>2</sup>	Single-component hybrid adhesive for high stress
209049	Two-component adhesive	UZIN KR 430	ECT EMISIIONEN	38 x 8 kg	single	ca. 250 – 600 g/m <sup>2</sup>	Polyurethane adhesive for heavy-duty flooring
207291	Floorer's trowel	TKB A1		10 pcs. per pack	single	/	Width 250 mm
207292	Floorer filler	TKB A2		10 pcs. per pack	single	/	Width 250 mm



**PUBLISHER**

PRODUX concepts & services AG  
Phone: +41 (0)62 959 90 90 | Fax: +41 (0)62 959 90 99  
[www.produx.ch](http://www.produx.ch) | [info@prodex.ch](mailto:info@prodex.ch)

**CONCEPTION/TEXT/DESIGN/LAYOUT**

Subject to alterations. Colors and graphics may differ due to the printing process.

**AS OF:**

November 2021 / English